

MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 RUBBER WANDER SOCKET 2P+E 250V 16A

Reference:

00125

Characteristics:

| | |
|------------------|---|
| Product type: | Rubber wander socket |
| Current: | 16A |
| Poles: | 2P+E |
| Voltage: | 220-250 V |
| Frecuency(Hz): | - |
| Time code: | - |
| Colour: | Black |
| Weight (kg): | 0,71 |
| Dimensions: | |
| Materials: | Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy |
| Packaging units: | 20 |

Technical data:

| | |
|-------------------------------|-----------------|
| Degree of protection: | IP44 |
| Degree of protection remarks: | |
| Resistance to impact: | IK08 |
| Glow wire resistance: | 960 °C |
| Ball pressure test: | 125 °C |
| Ambient temperature range: | -25 °C / +40 °C |

Certifications and norms:

| | |
|---------------|-------------|
| Directive: | 2014/35/EU |
| Standards: | IEC 60884-1 |
| Certificates: | |



Codes:


| | |
|------------------------|---------------|
| EAN: | 8431044001258 |
| Customs tariff number: | 85.36.69.90 |
| ETIM 8.0: | EC001327 |

MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 RUBBER WANDER SOCKET 2P+E 250V 16A

Reference: 00125

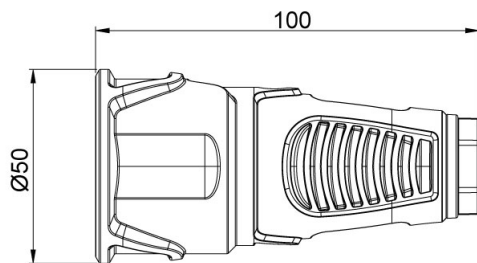

Dimensions:

Sustainability:

RoHS - REACH

Product end of life stage:

Product concerned in the WEEE regulations.

Supply:

Supplied in a single box per packaging multiple