

MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER SOCKET 3P+E 380V 32A 6H

Reference:

03705

Characteristics:

| | |
|------------------|---|
| Product type: | Low voltage wander socket |
| Current: | 32A |
| Poles: | 3P+E |
| Voltage: | 380/415 V |
| Frecuency(Hz): | - |
| Time code: | 6 |
| Colour: | Red |
| Weight (kg): | 1,36 |
| Dimensions: | |
| Materials: | Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy |
| Packaging units: | 5 |

Technical data:

| | |
|-------------------------------|-----------------|
| Degree of protection: | IP66-IP67 |
| Degree of protection remarks: | |
| Resistance to impact: | IK08 |
| Glow wire resistance: | 960 °C |
| Ball pressure test: | 125 °C |
| Ambient temperature range: | -25 °C / +40 °C |

Certifications and norms:

| | |
|---------------|---------------|
| Directive: | 2014/35/EU |
| Standards: | IEC 60309-1-2 |
| Certificates: | |



Codes:


| | |
|------------------------|---------------|
| EAN: | 8431044037059 |
| Customs tariff number: | 85.36.69.90 |
| ETIM 8.0: | EC001320 |

MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER SOCKET 3P+E 380V 32A 6H

Reference: 03705

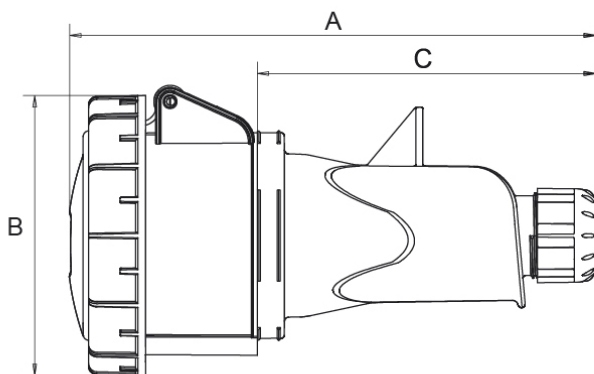

Dimensions:

| I | Poles | Dimensions | | |
|------|--------|------------|-----|-----|
| | | A | B | C |
| 16 A | 2P+E | 156 | 69 | 96 |
| | 3P+E | 160 | 77 | 106 |
| | 3P+N+E | 172 | 89 | 111 |
| 32A | 2P+E | 182 | 89 | 111 |
| | 3P+E | 182 | 89 | 111 |
| | 3P+N+E | 189 | 98 | 118 |
| 63 A | 2P+E | 269 | 114 | |
| | 3P+E | 269 | 114 | |
| | 3P+N+E | 269 | 114 | |
| 125A | 2P+E | 287 | 124 | |
| | 3P+E | 287 | 124 | |
| | 3P+N+E | 287 | 124 | |

Sustainability:

RoHS - REACH

Product end of life stage:

Product concerned in the WEEE regulations.

Supply:

Supplied in a single box per packaging multiple