

GLASS SERIES

IP66 POLYESTER WALL-MOUNTING CABINETS

Description: IP66 POLYESTER WALL-MOUNTING CABINET 400x400x200 OPAQUE DOOR

Reference:

POL404020

Characteristics:

Product type:	Polyester wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 400x400x200 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	Double-bit 3-mm DIN lock
Finish:	Double insulation: Class II
Colour:	RAL 7035
Mounting plate:	Without mounting plate
Weight (kg):	4,6
Materials:	Fibreglass-reinforced polyester
Thickness:	Enclosure 2,8 mm. Door 2,8 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	Fibreglass-reinforced polyester
Capacity:	
Max. cabinet load:	32 kg
Max. mounting plate load:	26 kg
Max. door load:	5 kg

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	
Resistance to impact:	IK10
Ambient temperature range:	-30 °C / +60 °C
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	



Codes:


EAN:	8431044292021
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

GLASS SERIES

IP66 POLYESTER WALL-MOUNTING CABINETS


Description: IP66 POLYESTER WALL-MOUNTING CABINET 400x400x200 OPAQUE DOOR

Reference: POL404020

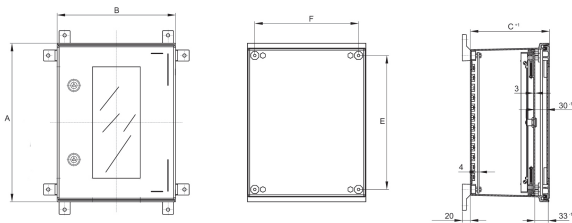

Standard drawing



Detailed drawing:  <http://www.ide.es/downloads/planos/pdf/POL404020.pdf>
 <http://www.ide.es/downloads/planos/dxf/POL404020.dxf>
 <http://www.ide.es/downloads/planos/stp/POL404020.stp>

Cable entry:	-	Body to be flush-fitted:	-
Wall fixing:	(ExF) 338x362 mm	Wall fixing material:	-
Inside usable space:	(Height x Width) 362x363 mm	Glass door with transparent panel:	-
No. Hinges:	2	Door profiles:	-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual packaging. The accessories for fitting the mounting plate are fitted on the cabinet. Plate supplied in individual packaging if requested as an accessory.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial environments and outdoor facilities. food, chemical and pharmaceutical industries, transformer sub-stations and outdoor areas where durability and resistance against chemicals and UV rays are necessary.