

Sedi operative:
Via Liguria, 52 - 37060 Lugagnano di Sona (VR)
Tel. +39 045 6230 855 / 045 989477 - Fax +39 045 8510550
info@italweberelettra.it - www.italweberelettra.it

Via Per Inveruno, 103 - 20020 Busto Garolfo (MI)
Tel. +39 0331 537508 - Fax +39 0331 537504
info@italweberelettra.it - www.italweberelettra.it

Data - Sheet**Single-Phase Transformer****Characteristics**

Application
Country of Origin
Installation
Service
Transformer Rated power (VA)
Primary Voltage (V)
Regulation Taps (V)
Secondary Voltage 1 (V)
Regulation Taps (%)
Rated Power (VA)
Frequency (Hz)
Altitude o.s.l. (m)
Ambient Temperature (°C)
Environmental / Climatic / Fire Behaviour Class
Insulation Class
Thermal Class
Cooling type
Winding Material
Winding Type
Surface Treatment
Electrostatic Shield

Technical Data

Standard
Rule Reference
Frequency (Hz)
No-Load Losses, Po (W)
Load-Losses, Pk at 120°C (W)
Short-Circuit Voltage, Uk at 120°C (%)
Efficiency (%)
No-Load Voltage Secondary 1 (V)
Dielectric Strength (PRI-SEC-GROUND) (V)
Sound Power Level Lwa (dBA)

Cod. CFM010K0T248

Dry-Type, associated, for specific use not resistant at short circuit and input overload


Standard
Italy
For internal Fixed
Continuous
10000
415 Output side:1
220 Output side:1
10000
50/60
≤1000
40
E1-C1-F0
F
F
Air / Natural
Aluminum
Impregnated
Tropicalized
No

Sedi operative:
Via Liguria, 52 - 37060 Lugagnano di Sona (VR)
Tel. +39 045 6230 855 / 045 989477 - Fax +39 045 8510550
info@italweberelettra.it - www.italweberelettra.it

Via Per Inveruno, 103 - 20020 Busto Garolfo (MI)
Tel. +39 0331 537508 - Fax +39 0331 537504
info@italweberelettra.it - www.italweberelettra.it


Preliminary Values

Lenght	(mm)	280
Depth	(mm)	330
Height	(mm)	450
Fixing X	(mm)	
Fixing Y	(mm)	
Net mass, packing not included	(kg)	68
Indicative Dimensions		



Box

Lenght	(mm)	
Depth	(mm)	
Height	(mm)	
Net mass, packing not included	(kg)	
Protection deg.	IP	
Color	RAL	

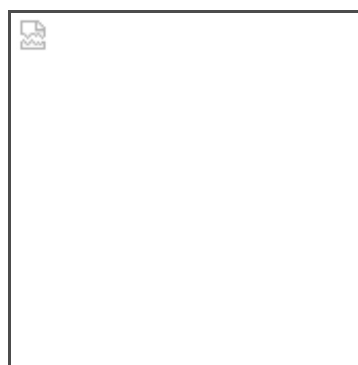

Accessories

Thermistor PT100	☐
Thermistor PTC	☐
Thermistor KLIXON	☐
Forced air cooling Kit	☐
Unit Control for Insulation	☐
Vibration Dampers	☐
Anti-condensation Resistance	☐
Wheels	☐
Control Unit with 4 circuits for transformer temperature control,	☐
with universal power supply	☐
☐ Wired	
☐ Separated supplied, without connections	

☐
☐
☐
☐
☐
☐
☐
☐

☐ T-154	☐ MSF-220S
☐ MT-200 LITE	☐ MT-300

Note: PRIMARY WINDING MONOPHASE 425V - SECONDARY WINDING MONOPHASE 220V

COMMUNICATE ANY CHANGE BEFORE PROCEEDING WITH REGULAR ORDER