
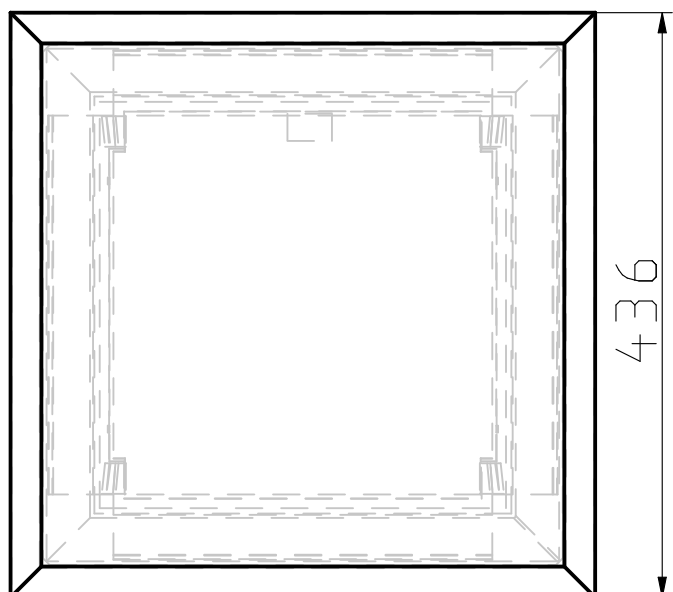
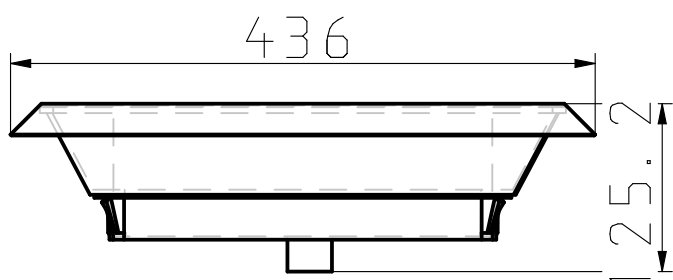


ITEM (Item no.)	RFU5005R5
DETAIL ()	low
INFO (Info PDF)	Info PDF
DES (Description)	Roof fan Air flow 350 m ³ /h
MAT (Material)	Mild steel
OV (Operating voltage)	230 V, 50/60 Hz
IP (Protection)	IP 54
CON (Connection)	Terminal strip
FM (Filter mat / EN779)	G4
FE (Filtration efficiency / %)	>90
BT (Bearing type)	Ball
FAF (Free air flow / m ³ /h)	350
I (Current / A)	4 x 0.20/0.20
N (Noise / dB)	67
UA (Unimpeded airflow / m ³ /h)	350
SL (Service life L10 / h)	50000
CO (Cut-out / mm)	291 x 291
P (Power / W)	4 x 28/29
FUS (Fuse / A)	6
AF (RFU+EFA Air flow / m ³ /h)	242

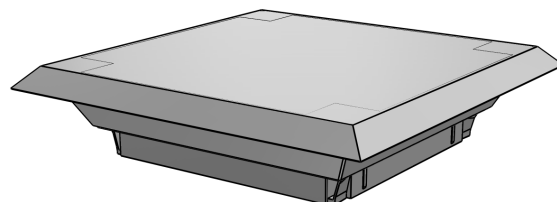

CE EAC