


## connection module N (01364)

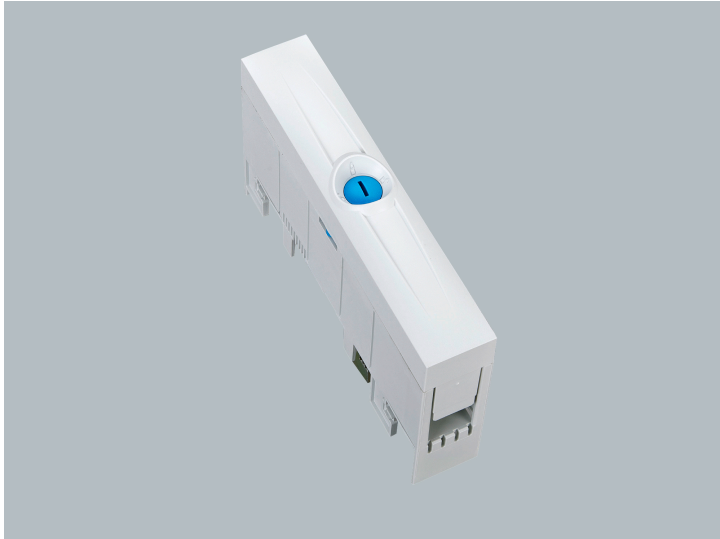

The picture may show a similar product.

### Description

Part No.: **01364**000  
CRITO<sup>®</sup> 30Compact  
connection module N  
10 - 120 mm<sup>2</sup>  
for busbars 12 x 5, 10

### System

30Compact 5P

Product group 07

Subgroup 44

pack size 1

EAN 4021267013646

ECLASS 6.1 27141146

ECLASS 7.1 27141146

ETIM 4.0 EC000001

ETIM 5.0 EC000001

# Approvals

## Standards

IEC 61439-1:2020  
IEC 60999-1:1999  
IEC 60999-2:2003

CCC approval: no certification required

# Technical data

## Details IEC

### Standards

IEC 61439-1:2020  
IEC 60999-1:1999  
IEC 60999-2:2003

### Electrical data IEC

rated voltage (IEC) AC: 690 V

rated peak withstand current  $I_{pk}$  max.: 35.1 kA

rated short-time withstand current  $I_{CW}$  (1.0 s) max.: 3.5 kA

### Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 1000 V

max. permitted voltage (IEC) DC: 1500 V

## Mechanical data

W x H x D: 30 x 160 x 80

weight: 21.5 kg/100

for busbars: 12 x 5, 10

## Terminal points

cage clamp connection

wire stripping: 25 mm

min. cross-section: 10 mm<sup>2</sup>

max. cross-section: 150 mm<sup>2</sup>

re: 10 - 10 mm<sup>2</sup>

rm: 16 - 150 mm<sup>2</sup>

f: 16 - 120 mm<sup>2</sup>

f + AE: 10 - 120 mm<sup>2</sup>

(f + AE may not fit with max. cross-section)

Terminal space: 15 x 15

Md min.: 12.0 Nm

Md max.: 12.5 Nm

Not suitable for aluminium cables !

## Anwendungshinweise

Not suitable for aluminium cables !

The insulation performance of the article depends on the installation conditions.

<https://pim.woehner.de/EN/EN/1000046276>