


## connecting set 1600 A (3-pole) (30322)

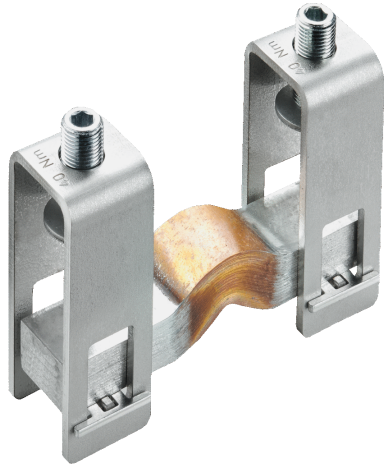

The picture may show a similar product.

### Description

Part No.: **30322000**

connecting set 1600 A (3-pole)

150 mm, flexible longitudinal connection  
for busbars double-T section

### System

60Classic

Product group 07

Subgroup 33

pack size 1

EAN 4021267303228

ECLASS 6.1 27400606

ECLASS 7.1 27400606

ETIM 4.0 EC000713

ETIM 5.0 EC000713

# Approvals

## Standards

IEC 61439-1:2020

CCC approval: no certification required

# Technical data

## Details IEC

### Standards

IEC 61439-1:2020

### Electrical data IEC

rated voltage (IEC) AC: 690 V

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 24.6 W.

(The power dissipation at full load would be 38.4 W.)

### Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 1000 V

max. permitted voltage (IEC) DC: 1500 V

current capacity (IEC) max.: 1,600 A

## Mechanical data

W x H x D: 150 x 45 x 105

weight: 536.0 kg/100

for busbars: double-T section

2 clamp screws M12

tightening torque 30Nm

permitted busbar displacement: 2  
permitted spacing between systems: 5 - 50 mm

## Application notes

The insulation performance of the article depends on the installation conditions.

**Reference** T and double-T section busbars can be clamped, angle deviations and busbar offset are compensated, 1 unit is needed for a 3-pole connection.

<https://pim.woehner.de/EN/EN/1000046060>