


adapter 100 A / 400 V (32226)

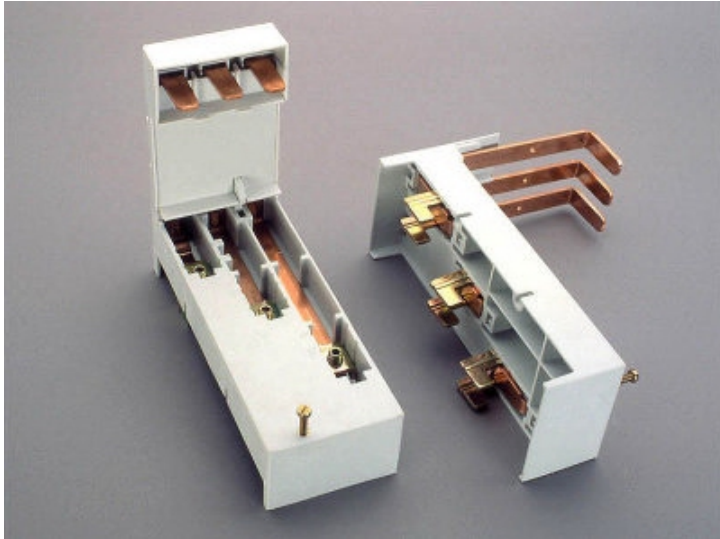

The picture may show a similar product.

Description

Part No.: **32226**000
adapter 100 A / 400 V

70 x 182

for Siemens S3

no longer available; Follower: **32981**

System

60Classic

Product group 05

Subgroup 28

pack size 2

EAN 4021267322267

ECLASS 6.1 27370304

ECLASS 7.1 27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2020

UL 508

Approvals

CSA , UL , DNV GL



type number: 4610.1

UL file: E123577, UL category (for USA): NMTR2 <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR8 <https://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

Rated current (IEC): 100 A

rated voltage (IEC) AC: 400 V

rated isolation voltage U_i AC: 400 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 3.1 W.

(The power dissipation at full load would be 4.9 W.)

Details UL

Standards

UL 508

Electrical data UL

rated current (UL): 100 A

rated voltage (UL) AC: 400 V

rated frequency (UL): 50 / 60 Hz

Mechanical data

W x H x D: 70 x 182 x 160

weight: 53.4 kg/100

poles: 3-pole

Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.

Reference Special adapter for Siemens S3 (3RV1x4...), ABB MS49x. For safe mechanical and electrical connection of the devices to the busbar.

<https://pim.woehner.de/EN/EN/1000043116>