


busbar adapter 16 A (32440)

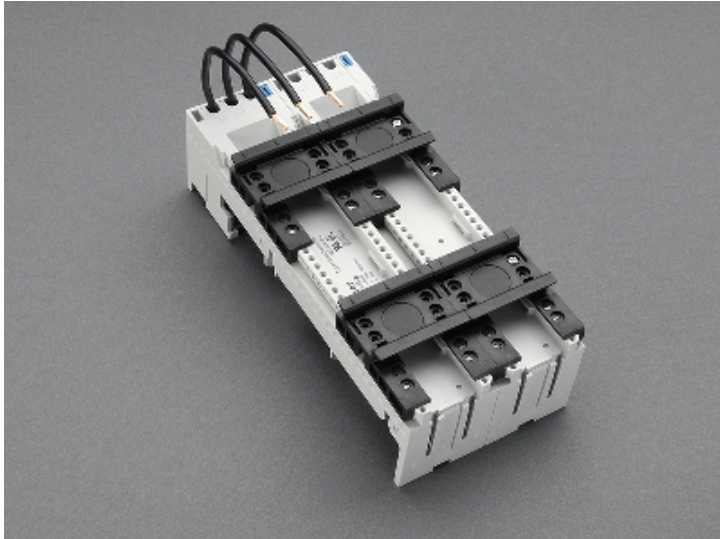

The picture may show a similar product.

Description

Part No.: **32440**000

EQUES[®] 60Classic

busbar adapter 16 A

for reversing starter Allen-Bradley 140M-RC2E, Eaton PKZM0, Siemens S00, Schneider Electric GV2 with spring terminals

90 x 200, with leads AWG 14 (2.5 mm²)

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Advantages of the product

Conductor ends ultrasonically sealed.

Click mechanism when pushing onto the busbar.

For switching devices with spring-loaded terminals

Product group 05

Subgroup 21

pack size 2
EAN 4021267324407

ECLASS 6.1 27370304
ECLASS 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2020
UL 508

Approvals

CSA, UL, DNV GL



type number: EEC6025

UL file: E123577, UL category (for USA): NMTR2 <https://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR8 <https://www.ul.com>
CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>
CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

Rated current (IEC): 16 A
rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V
rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.5 W.

(The power dissipation at full load would be 0.8 W.)

Details UL

Standards

UL 508

Electrical data UL

rated current (UL): 12 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

Mechanical data

W x H x D: 90 x 200 x 63

weight: 57.0 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

Terminal points

with leads

AWG14 (2,5 mm²)

wire stripping: 9 mm

Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.

short-circuit the short-circuit capacity of the combination of adapter and motor

withstandability: starter depends on the motor starter

<https://pim.woehner.de/EN/EN/1000042740>