

STAR

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x4 MODULES WITH NEUTRAL OR EARTH BAR

Reference:
CSN4PT/R

Characteristics:

Product type:	IP65 Boxes for industrial sockets, with neutral or earth bar
Exterior dimensions (Height x Width x Depth):	385x102x105 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	1x4 DIN rail
Installation:	Surface
Color:	RAL 7035
Window:	Transparent
Weight (kg):	0,70
Cable entry:	Rear: 2xM20.
Components:	Earthing: Cable section: 1x(16-35mm ²)+5x(10-25mm ²)
Materials:	Halogen-free plastic materials. Frame and base: ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h.
Lid-window-door material:	Tinted PC, UV protection

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 °C
Ball pressure test:	70 °C
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	



Codes:


EAN:	8431044284590
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000379

STAR

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x4 MODULES WITH NEUTRAL OR EARTH BAR

Reference: CSN4PT/R

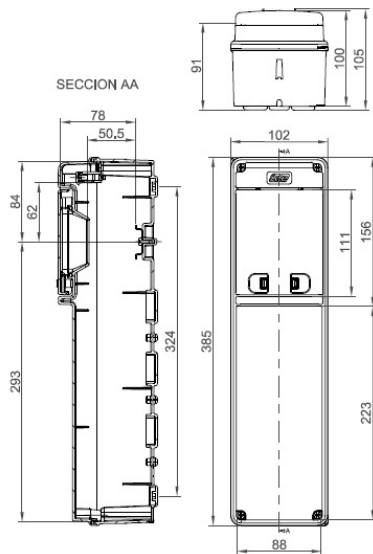

Detailed drawing:

 <http://www.ide.es/downloads/planos/pdf/CSN4PTR.pdf>

 <http://www.ide.es/downloads/planos/dxf/CSN4PTR.dxf>

 <http://www.ide.es/downloads/planos/stp/CSN4PTR.stp>

Exterior dimensions (Height x Width x Depth):

385x102x105 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 6

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.