


busbar adapter 32 A (32487)

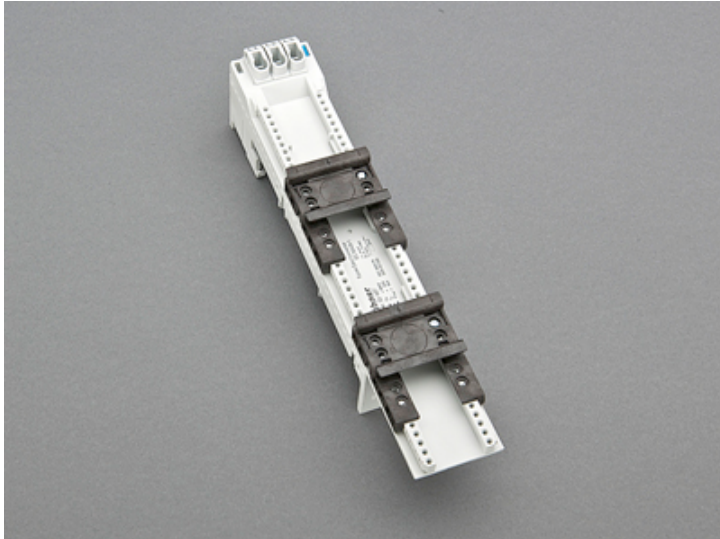

The picture may show a similar product.

Description

Part No.: **32487**000

EQUES[®] 60Classic

busbar adapter 32 A

2 adjustable mounting rails

45 x 260, without leads, with spring terminals 1.5 - 6 mm² from front
for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Advantages of the product

Free phase selection.

Click mechanism when pushing onto the busbar.

Product group 05

Subgroup 21

pack size 4

EAN 4021267324872

ECLASS 6.1 27370304

ECLASS 7.1 27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2020

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

Rated current (IEC): 32 A

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 1.6 W.

(The power dissipation at full load would be 2.5 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) DC: 800 V

Mechanical data

W x H x D: 45 x 260 x 63

weight: 35.5 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

Application notes

There must be a clearance of at least 12 mm above the article to remove it from the busbar system.

short-circuit the short-circuit capacity of the combination of adapter and motor

withstandability: starter depends on the motor starter

<https://pim.woehner.de/EN/EN/1000042849>