


module N (32632)

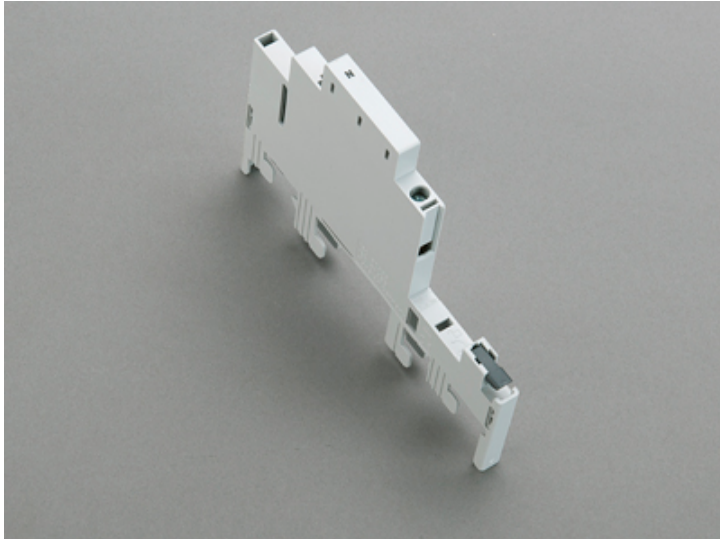

The picture may show a similar product.

Description

Part No.: **32632**000
module N
terminal 16 mm²
9 x 160
for busbars 12 x 5

System

30Compact 5P

Advantages of the product

The device can be locked onto the busbar system in a separating position. In this way, complete units 1P+N or 3P+N can be prepared for an isolation test without the leads having to be disconnected. (see assembly manual)

Product group 05

Subgroup 44

pack size 12

EAN 4021267326326

ECLASS 6.1 27370304
ECLASS 7.1 27370304
ETIM 4.0 EC001531
ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2020

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2020

Electrical data IEC

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 690 V

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.5 W.

(The power dissipation at full load would be 0.8 W.)

Connecting terminal 1.5 - 16mm²

Mechanical data

W x H x D: 9 x 160 x 114

weight: 4.4 kg/100

for busbars: 12 x 5

Application notes

Reference The device cannot be locked onto the busbar system (operating condition) and must always be plugged into module adapters.

<https://pim.woehner.de/EN/EN/1000043401>