

STAR KNOCK-OUT

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 BOX 2x12 (24) MOD. KNOCKOUT COVERS. N&E BARS

Reference:

PCSN24PT/RR

Characteristics:

Product type:	IP65 Boxes for industrial sockets with knock-out covers and neutral and earth bars
Exterior dimensions (Height x Width x Depth):	688x310x147 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	2x12 (24) DIN rail
Installation:	Surface
Color:	RAL 7035
Window:	Transparent
Weight (kg):	3,95
Cable entry:	Top: 6xM20-2xM25-2xM32-1xM40. Bottom: 4xM20-2xM25-2xM32-1xM40. Oblong rear: 4xOB 25/32/25
Components:	6 Plain covers - 2 16A/Schuko IP67 covers - 2 IP44/IP54 Schuko covers. Cable section N&E: 8x(2,5-6 mm ²)+8x(4-10 mm ²)+1x(10-25 mm ²)+1x(16-35 mm ²)
Materials:	Halogen-free plastic materials. Frame and base: ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h.
Lid-window-door material:	Tinted PC, UV protection

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 °C
Ball pressure test:	70 °C
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	125A
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	



Codes:


EAN:	8431044243795
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000379

STAR KNOCK-OUT


IP65 BOXES FOR INDUSTRIAL SOCKETS


Description: IP65 BOX 2x12 (24) MOD. KNOCKOUT COVERS. N&E BARS

Reference: PCSN24PT/RR

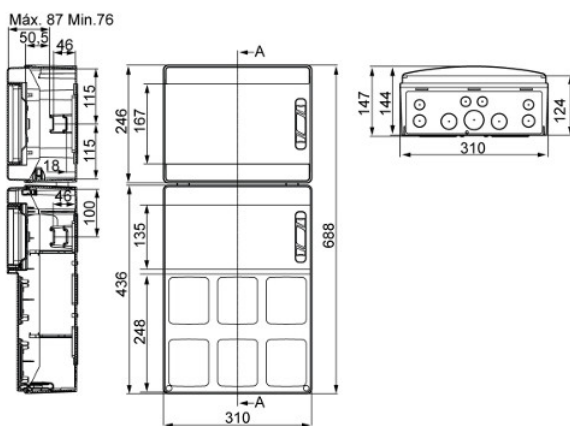

Detailed drawing:

 <http://www.ide.es/downloads/planos/pdf/PCSN24PTRR.pdf>

 <http://www.ide.es/downloads/planos/dxf/PCSN24PTRR.dxf>

 <http://www.ide.es/downloads/planos/stp/PCSN24PTRR.stp>

Exterior dimensions (Height x Width x Depth):

688x310x147 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 1

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.