

# THERMAL MANAGEMENT

## VENTILATION

IP54 AC Filter fan (34-42 m<sup>3</sup>/h)

Reference:  
**VF34AC**

### Technical data:

Voltage:	230 V 50-60 Hz
Air flow with filter:	34-42 m <sup>3</sup> /h
Protection rating:	IP54
Operating temperature:	-20 °C / +65 °C
Service (at 40 °C):	50.000 h
Relative humidity range:	0-95%
Filtration efficiency:	Up to 73%



Noise level:	32-34 dB
Static pressure:	39-45 Pa
Direction of flow:	From exterior to interior
Reversible:	Yes
Electrical connection:	Terminal
Current consumption:	0,06-0,07 A
Energy consumption:	12-11 W
Protection rating:	Impedance

### Specifications:


Dimensions:	116,5x116,5x55 mm
Thickness of the cabinet wall:	2-3 mm
Cut-off dimensions:	93x93 mm
Colour:	RAL 7035
Material:	ABS. Grille with UV protection.
Filter material:	Nylon fibre 150 gm <sup>3</sup>
Bearing:	Ball bearing
Seal:	Autoadhesive polyurethane
Weight:	0,38 kg
Assembly:	Quick-connect clip

# THERMAL MANAGEMENT

## VENTILATION

IP54 AC Filter fan (34-42 m<sup>3</sup>/h)

Reference:  
**VF34AC**

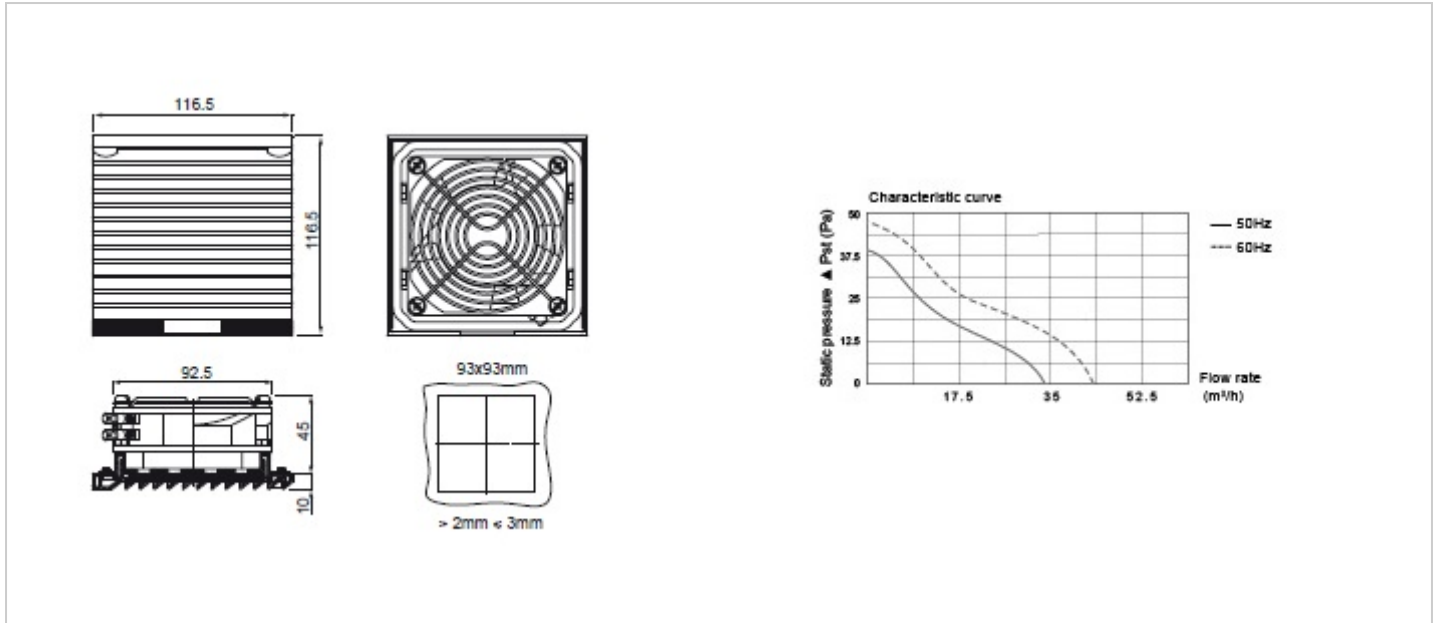

### Codes:

**EAN:** 8431044250168  
**Customs tariff number:** 85.38.10.00  
**ETIM 8.0:** EC000320

### Product end of life:

Product affected by the WEEE Regulation.

### Supply:

Supplied in individual cardboard packaging.

### Certificates and standards:

**Certificates:** CE, ROHS

