

Accessories




» **External handle** included shaft ^{*(e1)}
 IP65
 CODE DS-LA31



» **Emergency external handle** included shaft ^{*(e1)}
 IP65
 CODE DS-LR31




» **Direct handle**
 CODE DM2SI31



» **Shafts**
Standard shaft included ^{*(e1)}
 L (mm) | P (mm)
 186 | 235... 286


Shaft extensions
 Type 1
 L (mm) | P (mm) | CODE
 345 | 235... 445 | DS-EP23



» **Rear protective plate**
 3P | 4P
 DM2PP31 | DM2PP32

Dimensions (mm)

Door drilling for external handle



» **Terminal shrouds**

3P INPUT | 3P OUTPUT | 4P INPUT/OUTPUT
 DM2CU31 | DM2CU32 | DM2CU33
 (1 kit for input or output)



» **Auxiliary contacts**

1NO+1NC CODE D5LAU01
 2NO+2NC CODE D5LAU02

le = 16 A (resistive loads)
 4 A (inductive loads) at 250 Vac.





» **Safety key lock device**

Simple CODE DS-CB31
 Double CODE DS-CF31

For external handle, lock the handle by means of a key in position "OFF" (under request, in "ON"), the key can only be removed with the handle locked



Door drilling for handle and key lock device
 Simple | Double

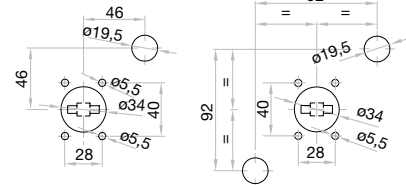

	S max (Cu) mm ²	H max (Cu) mm	L max (Cu) mm	M	M Nm
630 A	2x185	2x7	50	M12	45
800 A	2x240	2x7	50	M8	13








Fuses

Maximum dimensions

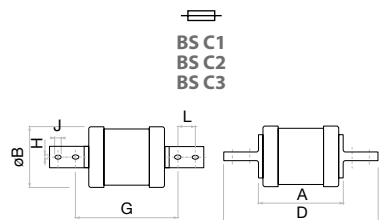

A		B	
3P	4P	3P	4P
381	426	166	211

	A	øB	D	G	H	J	L
	max	max	max	nom	nom	min	min
C1	83	66				11	25,4
C2	85	77	212	133	10,3		
C3	89	84				12,5	



External handle top view