


clip-on screw connection, for cable lugs (01047)

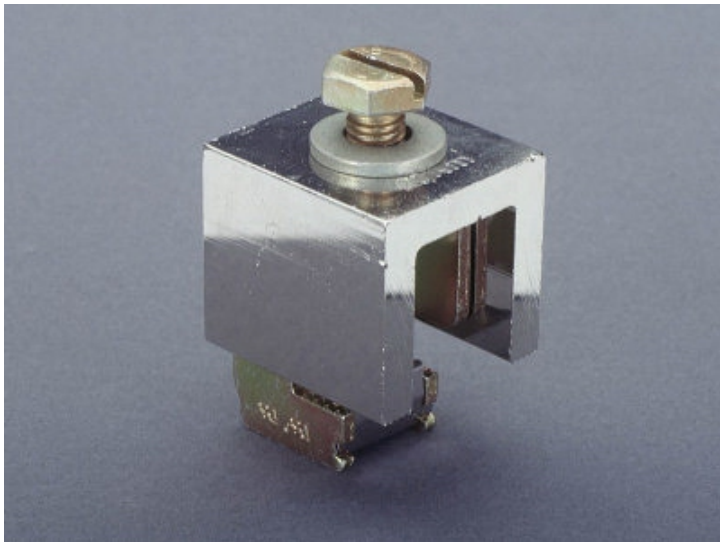

The picture may show a similar product.

Description

Part No.: **01047**000

clip-on screw connection, for cable lugs

M10

for busbars 12, 15, 20, 25, 30 x 10 and section busbars

System

60Classic, 100Energy, centre feed unit

Product group 07

Subgroup 28

pack size 6

EAN 4021267010478

catalog page 2020 : 3.7, 5.2

ECLASS 6.1 27141146
ECLASS 7.1 27141146
ETIM 4.0 EC000001
ETIM 5.0 EC000001

Approvals

Standards

IEC 61439-1:2011

Approvals

DNV GL, EAC



type number: 520

EAC Type: TE-T

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2011

Electrical data IEC

rated voltage (IEC) AC: 690 V

The insulation performance of the article depends on the installation conditions.

rated peak withstand current I_{pk} max.: 59.7 kA

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.3 W.

(The power dissipation at full load would be 0.5 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 1000 V

max. permitted voltage (IEC) DC: 1500 V

current capacity (IEC) max.: 630 A

Mechanical data

W x H x D: 38 x 42 x 47

weight: 36.2 kg/100

for busbars: 12, 15, 20, 25, 30 x 10 and section busbars

Screw M10, 10mm available length

Terminal points

screw connection M10

Terminal space: M10 x 10

Suitable for aluminium cables.

When using aluminium cables, observe the maintenance instructions.