

# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+N+E 380V 125A 6H

Reference:  
**03656**

### Characteristics:

Product type:	Low voltage wander plug
Current:	125A
Poles:	3P+N+E
Voltage:	200/346 - 240/415 V
Frecuency(Hz):	-
Time code:	6
Colour:	Red
Weight (kg):	2,53
Dimensions:	
Materials:	Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy
Packaging units:	2

### Technical data:

Degree of protection:	IP66-IP67
Degree of protection remarks:	
Resistance to impact:	IK08
Glow wire resistance:	960 °C
Ball pressure test:	125 °C
Ambient temperature range:	-25 °C / +40 °C

### Certifications and norms:

Directive:	2014/35/EU
Standards:	IEC 60309-1-2
Certificates:	



### Codes:


EAN:	8431044036564
Customs tariff number:	85.36.69.90
ETIM 8.0:	EC000140

# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP66-IP67 WANDER PLUG 3P+N+E 380V 125A 6H

Reference: 03656

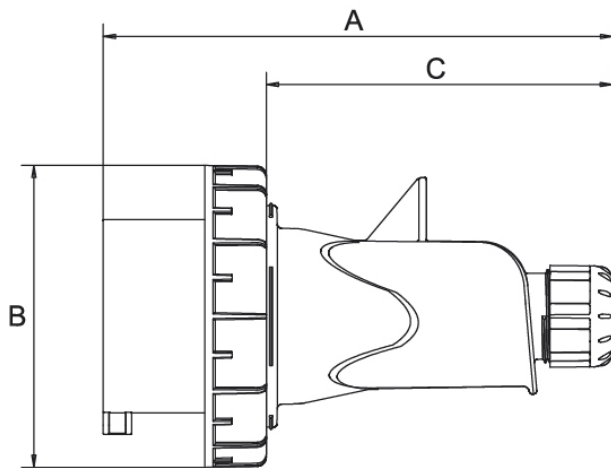

### Dimensions:

I	Poles	Dimensions		
		A	B	C
16A	2P+T	134	69	96
	3P+T	144	77	106
	3P+N+T	149	89	111
32A	2P+T	156	89	111
	3P+T	156	89	111
	3P+N+T	163	98	118
63A	2P+T	257	114	-
	3P+T	257	114	-
	3P+N+T	257	114	-
125A	2P+T	270	131	-
	3P+T	270	131	-
	3P+N+T	270	131	-

### Sustainability:

RoHS - REACH

### Product end of life stage:

Product concerned in the WEEE regulations.

### Supply:

Supplied in a single box per packaging multiple