

Sedi operative:
Via Liguria, 52 - 37060 Lugagnano di Sona (VR)
Tel. +39 045 6230 855 / 045 989477 - Fax +39 045 8510550
info@italweberelettra.it - www.italweberelettra.it

Via Per Inveruno, 103 - 20020 Busto Garolfo (MI)
Tel. +39 0331 537508 - Fax +39 0331 537504
info@italweberelettra.it - www.italweberelettra.it

Data - Sheet

Single-Phase Transformer

Characteristics

Application
Country of Origin
Installation
Service
Transformer Rated power (VA)
Primary Voltage (V)
Regulation Taps (V)
Secondary Voltage 1 (V)
Regulation Taps (%)
Rated Power (VA)
Frequency (Hz)
Altitude o.s.l. (m)
Ambient Temperature (°C)
Environmental / Climatic / Fire Behaviour Class
Insulation Class
Thermal Class
Cooling type
Winding Material
Winding Type
Surface Treatment
Electrostatic Shield

Technical Data

Standard
Rule Reference
Frequency (Hz)
No-Load Losses, Po (W)
Load-Losses, Pk at 120°C (W)
Short-Circuit Voltage, Uk at 120°C (%)
Efficiency (%)
No-Load Voltage Secondary 1 (V)
Dielectric Strength (PRI-SEC-GROUND) (V)
Sound Power Level Lwa (dBA)

Cod. CFM00630R642

Dry-Type, associated, for specific use not resistant at short circuit and input overload


Standard
Italy
For internal Fixed
Continuous
630
230/400/415/440/480 Output side:1
110/0/110 Output side:2
630
50/60
≤1000
40
E1-C1-F0
F
F
Air / Natural
Copper
Impregnated
Tropicalized
No
CE
EN 61558-2-4
50
13,8
41,7
6,7
91,9
115,1/230,1
5500/2750/2750
≤ 65

Sedi operative:
Via Liguria, 52 - 37060 Lugagnano di Sona (VR)
Tel. +39 045 6230 855 / 045 989477 - Fax +39 045 8510550
info@italweberelettra.it - www.italweberelettra.it

Via Per Inveruno, 103 - 20020 Busto Garolfo (MI)
Tel. +39 0331 537508 - Fax +39 0331 537504
info@italweberelettra.it - www.italweberelettra.it


Preliminary Values

Lenght	(mm)	152
Depth	(mm)	135
Height	(mm)	150
Fixing X	(mm)	
Fixing Y	(mm)	
Net mass, packing not included	(kg)	9
Indicative Dimensions		



Box

Lenght	(mm)	
Depth	(mm)	
Height	(mm)	
Net mass, packing not included	(kg)	
Protection deg.	IP	
Color	RAL	

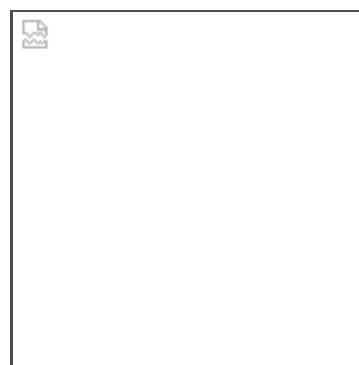

Accessories

- Thermistor PT100
- Thermistor PTC
- Thermistor KLIXON
- Forced air cooling Kit
- Unit Control for Insulation
- Vibration Dampers
- Anti-condensation Resistance
- Wheels
- Control Unit with 4 circuits for trasformer temperature control,
with universal power supply
- Wired
- Separated supplied, without connections

- T-154
- MSF-220S
- MT-200 LITE
- MT-300

Note:

COMMUNICATE ANY CHANGE BEFORE PROCEEDING WITH REGULAR ORDER