


## main branch terminal (02606)

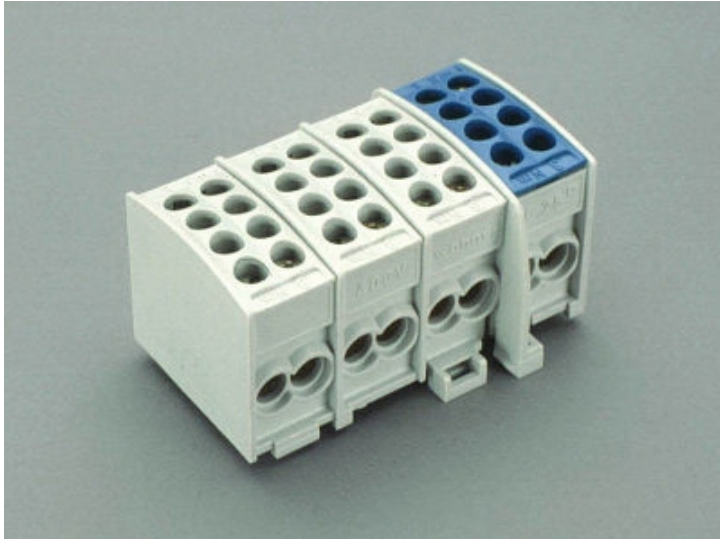

The picture may show a similar product.

### Description

Part No.: **02606**000

main branch terminal

4-pole, 4 inserts 4x25 mm<sup>2</sup>, neutral is blue  
25 mm<sup>2</sup>

for mounting rail

**no longer available**

### System

Panel

Product group 08

Subgroup 03

pack size 30

EAN 4021267026066

# Approvals

## Standards

DIN VDE 0603-2/03.98

## Approvals

VDE



CCC approval: no certification required

# Technical data

## Details IEC

### Standards

DIN VDE 0603-2/03.98

### Electrical data IEC

rated voltage (IEC) AC: 400 V

rated voltage (IEC) DC: 400 V

rated surge voltage  $U_{imp}$ : 6 kV

### Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 690 V

max. permitted voltage (IEC) DC: 690 V

### **Mechanical data**

W x H x D: 81 x 56 x 39

weight: 26.7 kg/100

poles: 4-polig

Mounting: for mounting rail

Snap fastening vertical and horizontal

### **Terminal points**

Not suitable for aluminium cables !

screw M6 :

2,5 - 25 mm<sup>2</sup>, solid and stranded round cables,

1,5 - 16 mm<sup>2</sup>, flexible cables, with wire-end ferrule,

Md 3 Nm

## Application notes

Not suitable for aluminium cables !

**Reference** Two clamp screws for making safe contact are located at each point.

<https://pim.woehner.de/EN/EN/1000046505>