

ROC SERIES

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 POLYESTER BOX WITH POLYCARBONATE OPAQUE LID - MOD.: 3x2

Reference:

ROC32PO

Characteristics:

Product type:	Polyester double insulation box with opaque cover
Dimensions cabinet:	(AxBxC) 270x180x141 mm
Installation:	Surface
Type of door:	Opaque lid
Locking:	Screws for use with a screwdriver
Finish:	Double insulation: Class II
Colour:	RAL 7035
Mounting plate:	Without mounting plate
Weight (kg):	1,2
Materials:	Fibreglass-reinforced polyester
Thickness:	
Sealing gasket:	Polyurethan
Door material:	Polycarbonate
Capacity:	
Max. cabinet load:	
Max. mounting plate load:	
Max. door load:	

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	
Resistance to impact:	IK09
Ambient temperature range:	-30 °C / +60 °C
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	



Codes:


EAN:	8431044123851
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC002600

ROC SERIES

IP66 POLYESTER DOUBLE INSULATION BOXES

Description: IP66 POLYESTER BOX WITH POLYCARBONATE OPAQUE LID - MOD.: 3x2

Reference: ROC32PO

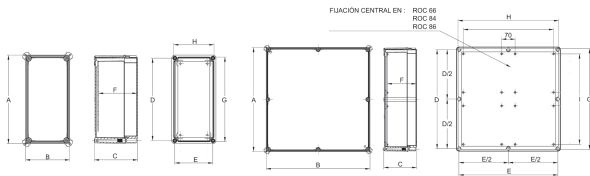

Standard drawing

Detailed drawing: <http://www.ide.es/downloads/planos/pdf/ROC32PO.pdf>
<http://www.ide.es/downloads/planos/dxf/ROC32PO.dxf>
<http://www.ide.es/downloads/planos/stp/ROC32PO.stp>

Cable entry: -
Wall fixing: (GxH) 245x155 mm
Inside usable space: (DxExF) 250x160x124 mm
No. Hinges: -

Body to be flush-fitted: -
Wall fixing material: -
Glass door with transparent panel: -
Door profiles: -

Sustainability:

RoHS - REACH

Supply:

Supplied in a single box per packaging multiples (4x). Each reference includes a bag with four standard manual closing screws and four screws for fixing to the base plate.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial environments and outdoor facilities. food, chemical and pharmaceutical industries, transformer sub-stations and outdoor areas where durability and resistance against chemicals and UV rays are necessary.